(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 12 August 2004 (12.08.2004)

PCT

(10) International Publication Number WO 2004/067179 A1

(51) International Patent Classification7: 13/04

B02C 19/14,

(21) International Application Number:

PCT/GB2004/000248

- (22) International Filing Date: 22 January 2004 (22.01.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0302150.8


30 January 2003 (30.01.2003)

- (71) Applicant (for all designated States except US): IN-Q-BA-TOR LIMITED [GB/GB]; 13 Park Road, Twickenham, Middlesex TW1 2QD (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WALDRON, Christopher, John [GB/GB]; 23 Crescent Road, Kingston upon Thames, Surrey KT2 7RD (GB).

- (74) Agent: GORDON, Richard, John, Albert; 13 Park Road, Twickenham, Middlesex TW1 2QD (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, 7W.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: GLASS BOTTLE BREAKING APPARATUS

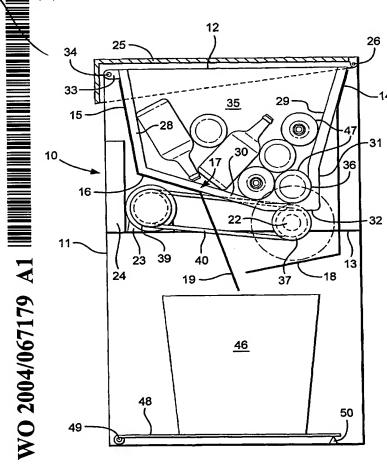

Glass bottle breaking apparatus (57) Abstract: comprises a hopper (17) for receiving empty glass bottles (47) in bulk, at least a portion of the hopper (17) being formed as a grating including stop means (31), and a shaft (22) located outside of the hopper (17) carrying hammers (43, 44) mounted for pivotal movement relative to the shaft. When the shaft (22) is rotated on its central longitudinal axis by means of a motor (23) and drive (37, 39, 40), the flailing hammers (43.44) move in an arcuate path into and through the hopper (17) towards and through the stop means (31) and impact with bottles (47) contained within the hopper (17) and lying in the path of the hammers (43. 44) causing breakage of the bottles (47). The apparatus provides for a compact bottle breaking machine with reduced risk of jamming.